


KPU Series Kiosk Printers

KPU Series

The KPU Series, including 2-3" (variable) and 4" print width models, delivers exceptional self service kiosk and ATM direct thermal printing capability. A choice of vertical and horizontal mechanical orientations provides critical design flexibility. Combining high speed printing, integrated auto-cutter, presenter with retractor, and embedded bar codes, means users rapidly receive crisp, clear receipts or tickets - every time. And large roll support - supported by an innovative tension roller and brake design - coupled with status alerts, avoids downtime and minimizes maintenance and operating costs.

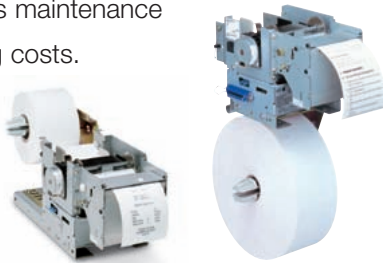

- High speed printing
- Large roll support (up to 228 mm diameter roll)
- Choice of vertical and horizontal orientations for greater design flexibility
- Choice of Serial, Parallel, and USB connectivity
- Windows 2000/XP drivers
- RoHS compliant

Model	KPU-S347* -11H Horizontal	KPU-S347* -11V Vertical	KPU-S447* -11H Horizontal	KPU-S447* -11V Vertical
Printing	Thermal line dot printing			
Method				
No. dots/line	640		832	
Resolution (dots/mm)	8			
Paper width (mm)	58 [±] , 60 [±] , 66 [±] , 76.2 [±] , 80 [±] , 82.55 [±]	112 [±]		
Printing width (mm)	54 to 80		104	
Max Speed (mm/sec)	200		150	
Paper path	Straight			
Character matrix example (HxW dots)	24 x 12, 24 x 24, 16 x 8, 16 x 16			
Character type	Optional Font, Downloaded Character, User-defined Character, Extend Graphics Character set, Katakana Character set, JIS 1&2 level Kanji			
Character size (HxW mm)	3.0 x 1.5, 3.0 x 3.0, 2.0 x 1.0, 2.0 x 2.0			
Bar code	UPC-A/E, JAN(EAN)8/13, ITF, CODE39, CODABAR, CODE93, CODE128			
2D bar code	PDF417			
Power supply (V)	AC adapter			
Interface	Serial (RS-232C), Parallel (IEEE1284 Nibble mode), or USB			
Command	ESC/POS™ conformity			
Service life	Pulse activation	100 million		
	Abrasion resistance (km)	50***		
Life of auto cutter (number of cuts)	300,000			
Operating temperature (°C)	0 to 40			
Dimensions (WxDxH mm)	132.0 x 225.0 x 140.0***	132.0 x 235.0 x 140.0***	161.0 x 236.0 x 140.0***	161.0 x 248.0 x 140.0***
Mass (g)	Approx. 3000		Approx. 3500	
Compliance	FCC, CE, VCCI			
Accessories	AC adapter, AC cable			

*S=Serial, P=Parallel, U=USB **ESC/POSTM: Registered trademark of SEIKO EPSON CORP
Use recommended thermal paper *Excluding protrusion