




Seiko Instruments

Thermal Printer Division

APU-9000-C Series Kiosk Printers

APU-9000-C

Built for speed, APU-9000-C series kiosk printers set the standard for performance and reliability in punishing self-service environments. That means a better user experience and lower operating costs. Extreme operating temperature ratings and support for thicker media make the C series the ideal ticket or receipt printer for both indoor and outdoor environments. And, the sleek new small footprint design ensures easier integration in retail, self-checkout, healthcare, hospitality, and banking self-service applications.

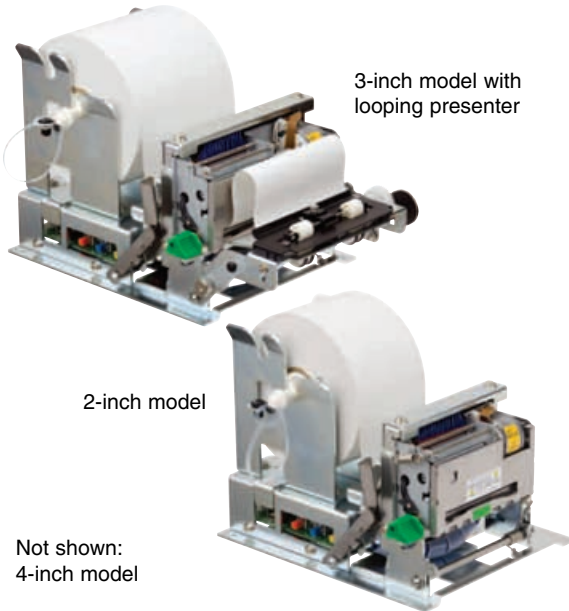

3-inch model with looping presenter

2-inch model

Not shown:
4-inch model

- Up to 250 mm/second print speed
- Minimum 150 km total printing
- 1 million or more cuts
- Extreme temperature support (-20 to 60 degrees C)
- Optional looping presenter



Model		APU-9247-C01	APU-9347-C01
Printing	Methods	Thermal line dot printing	
	No. dots/line	448	640
	Resolution (dots/mm)	8	
	Paper width (mm)	58/60 ^{††}	80/82.55 ^{††}
	Printing width (mm)	54/56	76/80
	Speed (max mm/sec)	250	
	Paper path	Straight	
	Character matrix (H x W dots)	24x24, 24x12, 16x16, 16x8	
	Character size (H x W mm)	3.0 x 3.0, 3.0 x 1.5, 2.0 x 2.0, 2.0 x 1.0	
	Character type	Optional Font, Downloaded Character, User-defined Character Extend Graphics Character set, Katakana Character set, JIS 1&2 level Kanji	
Bar code	UPC-A/E, JAN(EAN)8/13, ITF, CODE39, CODABAR, CODE93, CODE128, EAN128,PDF417, Data Matrix, Maxi Code, QR Code		
Power supply (V)	21.6 to 26.4		
Communication Interface	Serial(RS-232C), Parallel, USB		
Input buffer	2048 bytes		
Command	ESC/POST™ conformity ^{†††}		
Cutting	Method	Slide type	
	Cutting type	Partial cut / Full cut	
Service life	Pulse activation (pulse)	150 million	
	Abrasion resistance (km)	150 ^{†‡}	
	Life (cuts)	1,000,000	
Operating temperature (C°)	-20 to 60		
Dimensions (WxDxH mm)	140.0 x 165.0 x 132.0 ^{†‡‡††}	140.0 x 165.0 x 132.0 ^{†‡‡††}	
Mass (g)	Approx. 1400 ^{†††}	Approx. 1500 ^{†††}	

^{††} ESC/POS: Registered trademark of SEIKO EPSON CORP. ^{†‡} Use recommended thermal papers. ^{†‡‡} Excluding protrusion. ^{†††} Without presenter.



Seiko Instruments USA Inc.
Thermal Printer Division
2990 Lomita Blvd., Torrance, CA 90505
Telephone (310) 517-7778
Facsimile (310) 517-8154
Email: printerinfo@siu-la.com
www.siiprinters.com