

CUSTOM



P3X

Retail printer for high productivity on Windows®, Android™, iOS®, or Linux

P3X is the ideal **thermal POS printer** for the retail and hospitality sectors. Thanks to its compact and robust design, it adapts to any point-of-sale environment. The device also integrates well into POS systems running **Windows®, Android™, iOS®, or Linux**. P3X is available **with triple interfaces**: USB (or Virtual COM) - Ethernet - Serial.



Current Components Inc
203A East Main Street
Middletown MD 21769

Current Components Inc
277 Palmer Road
Unit 4A
Ware MA 01082

www.curcomp.com

1-800-342-9798

sales@curcomp.com

CHARACTERISTICS

1. **Great connectivity**
With triple interfaces: USB (or Virtual COM), LAN and Serial
2. **Versatility**
Thanks to the desktop and wall mounting
3. **Integrations**
It integrates into Windows®, Android™, iOS® and Linux
4. **Compatible**
With Custom printing tools, drivers, Custom Android™ SDK, Custom iOS® SDK and Custom Windows® SDK
5. **Reliable**
Thanks to the long-life printing head and cutter

MARKETS


- Retail
 - Hospitality
 - Betting
-

ACCESSORIES

- 57mm paper reduction kit
-

TECHNICAL SHEET

Printing method	Thermal, fixed head
Resolution	203 dpi (8 dot/mm)
Paper width	57mm / 80mm
Paper weight	from 60 g/m2 to 90 g/m2
Paper thickness	from 63 µm to 140 µm
External paper roll	Max. 80mm diameter
Prnting speed	200mm/s
Printer integrations	Print wired to LAN, USB or serial from Windows®, Android™ and Linux Simple integration of print in Android™ apps with Custom Android™ SDK. General print from Google and other common Android™ apps using Custom Print Services for Android™. Available from Google Play Print from iOS® over LAN by adding support for print in iOS® apps with Custom iOS® SDK toolkit
Interfaces	Ethernet + USB Full speed (or Virtual COM) + RS232
Printing driver	Windows® (32/64 bit); CUPS Linux (32/64 bit); Virtual COM (Linux or Windows 32/64 bit)
Receive buffer	16 kB
Flash memory	2 MB internal + 8 MB external
RAM memory	640 kB internal + SDRAM 8 MB
Graphic memory	512 kB
Auto-cutter	Cutter life 1 million cuts Total and partial cut
MTBF printing head	150 Km
Printing method	Normal, 90°, 180°, 270°
Printing format	Height and width from 1 to 8, bold, reverse, underlined, italic
Barcode printings	1D/2D barcodes (incl. QR codes) printing
Fonts	International fonts
Sensors	Paper end, cover and head temperature
Printer mounting	Desktop or Vertical wall mounting
Printer status	LED
Electrical specifications	Device: 24 Vdc ± 10% External power supply: da 90 Vac a 264 Vac
Typical consumption	1,5 A
Dimensions	190 mm (L) × 142 mm (W) × 135,5 mm (H)
Weight	1,1 Kg

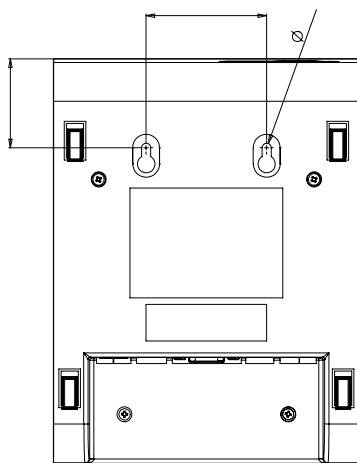

MODELS



911MH020200733

PRINTER P3X 80MM ETH USB
RS232 US

Via I. Newton, 4 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: - UNIQUE CODE: 8RQN7AZ

The technical data on this website are not binding and may be changed without advanced notice.

Last update: 15 June 2026



www.curcomp.com

1-800-342-9798

sales@curcomp.com

Current Components Inc
203A East Main Street
Middletown MD 21769

Current Components Inc
277 Palmer Road
Unit 4A
Ware MA 01082